
# 2000S Version 1000 Holes Electronic Component Former and Cutter

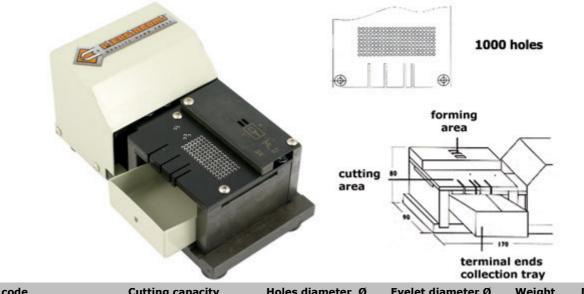


Order code **Cutting capacity** Holes diameter Ø Eyelet diameter Ø Weight **Dimensions** comp/h mm (gr) 2000S 1000 HOLES 1.0 1000-1500 1.2 170x90x80 4.0 **VERSION** 

2000S 1000 holes is a pneumatic machine for the forming and cutting (standard height 3 mm) of untaped electronic component terminals. 2000 S 1000 holes is supplied with a further cutting mask.

(1.5 mm height).

Holes diameter: 1.2 mm Eyelet diameter: 1.0 mm

Several forming masks are available on request:

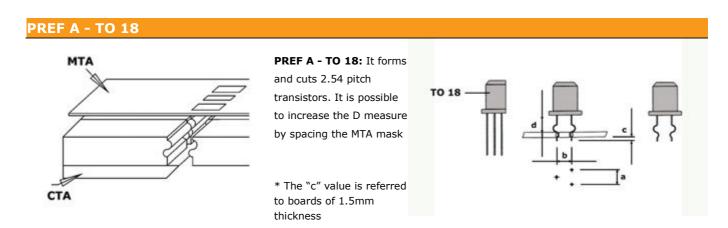


Order code	a (mm)	b (mm)	c* (mm)	d(mm)
PREF A - TO 18	2.54	1.27	1.40	4.00

# **AWM Weidner**




#### PREF A5 - TO 39 - TO5

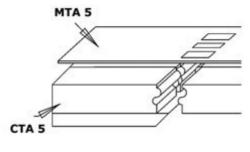

#### PREF A5 - TO 39/TO5:

It forms and cuts 5.08 pitch transistors. It is possible to increase the D measure by spacing the MTA5 mask

\* The "c" value is referred to boards of 1.5mm thickness

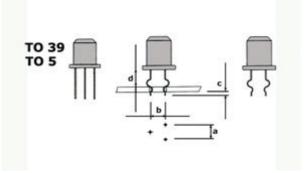

Order code	a (mm)	b (mm)	c* (mm)	d(mm)
				_

4.00


**PREF A5 - TO 39** 

5.08


2.54

1.40

#### PREF B - LED



PREF B - LED: It forms and cuts 2.54 pitch led with the MLD mask, or 5.08 pitch led with the MCC mask. It is possible to increase the D measure by spacing the MLD or the MCC masks

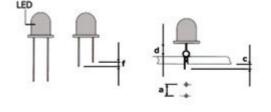


\* The "c" value is referred to boards of 1.5mm thickness

Order code	a (mm)	c* (mm)	d (mm)	f (mm)
PREF B - LED	2.54 - 5.08	1.40 short side	3.50	0.60

#### **AWM Weidner**




#### PREF C - CAPACITOR

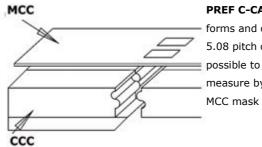


**PREF C-CAPACITOR:** It forms and cuts the leds of 5.08 pitch capacitors. It is possible to increase the D measure by spacing the

\* The "c" value is referred to boards of 1.5mm thickness




Order code	a (mm)	c* (mm)	d (mm)	
PREF C-CAPACITOR	5.08	2.00	3.50	

#### PREF D - LED/CAPACITOR



PREF D-LED/CAPACITOR For cutting leds and capacitors when polarity needs to be distinguished. It is possible to increase the C measure by spacing the MTC mask

\* The "c" value is referred to boards of 1.5mm thickness

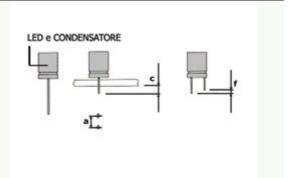



Order code	a (mm)	c* (mm)	d (mm)
PREF D-LED/CAPACITOR	2.54	1.50-4.50	0.6

# **AWM Weidner**




#### **PREF E - TO220**

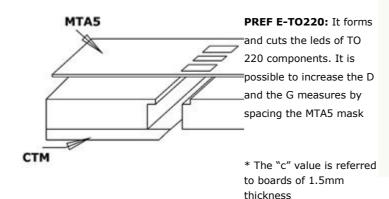


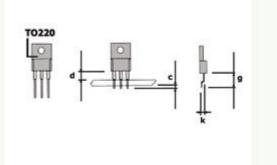

Order code	c* (mm)	d (mm)	k (mm)	g (mm)	
PREF E-TO220	1.50	4.00	2.54	7.00	

#### **PREF F - TO220**

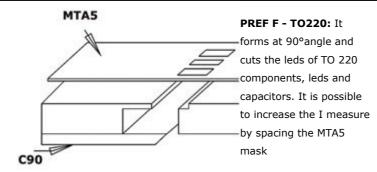

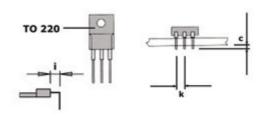


\* The "c" value is referred to boards of 1.5mm thickness


Order code	c* (mm)	i (mm)	k (mm)
PREF F - TO220	1.50	2.50	2.54

# **AWM Weidner**




#### PREF G - OSCILLATOR

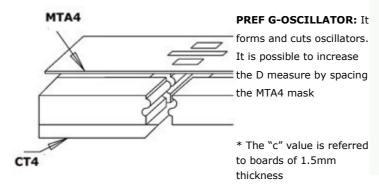


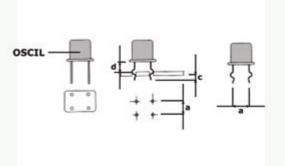

Order code	a (mm)	c* (mm)	d (mm)
DDEE C OCCULATOR	F 00 7 62	1.50	4.00
PREF G-OSCILLATOR	5.08-7.62	1.50	1.00

#### PREF H - TO220 / CAPACITOR/LED

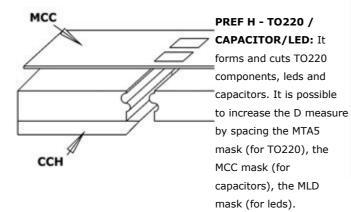

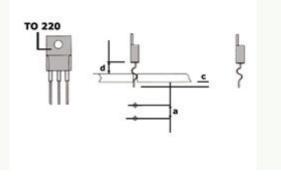

\* The "c" value is referred to boards of 1.5mm thickness

Order code	a (mm)	c* (mm)	d (mm)
PREF H - TO220 / CAPACITOR/LED	TO 220 conden led	1.40	4.00






# PREF I - TO220 MTA5

CCI


PREF I - TO220: Special forming mask for the forming of TO 220 and TO 247. 2.54mm pitch of the central lead.




Order code a (mm) b (mm)

**PREF I - TO220** 3.00 2.54


#### **PREF M - TO220**

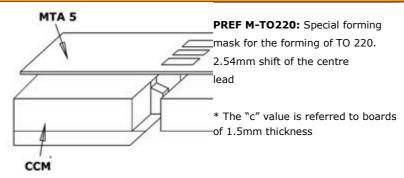



Order code	a (mm)	b (mm)	c* (mm)	d (mm)	
PRFF M-TO220	2 54	3 00	2.00	7 50	

#### PREF P - LED OR CAPACITOR

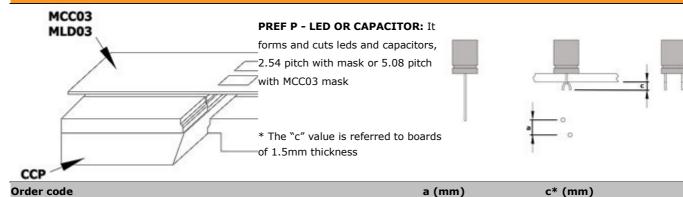

**PREF P - LED OR CAPACITOR** 2.54-5.08 1.50

a (mm)

#### **AWM Weidner**

Order code

