


# 2000S

## Electronic Component Former and Cutter Standard

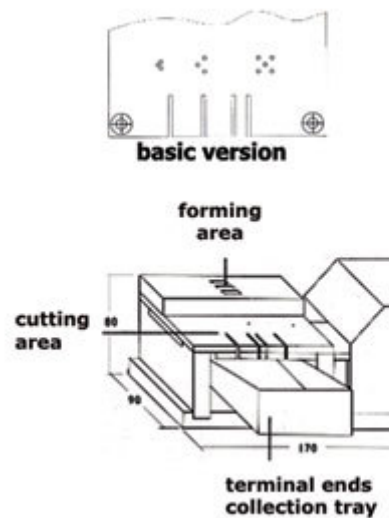

Order code	Cutting capacity comp/h	Holes diameter Ø mm	Eyelet diameter Ø mm	Weight (gr)	Dimensions
<b>2000S STANDARD VERSION</b>	1000-1500	1.2	1.0	4.0	170x90x80


2000S is a pneumatic machine for the forming and cutting (standard height 3 mm) of untaped electronic component terminals. 2000 S is supplied with a further cutting mask (1.5 mm height).

Holes diameter: 1.2 mm

Eyelet diameter: 1.0 mm


Several forming masks are available on request:

### PREF A - TO 18

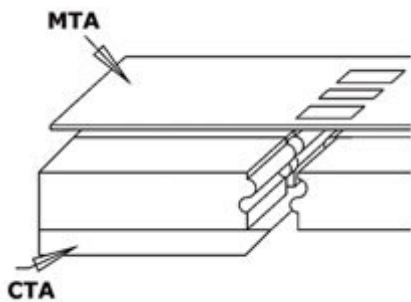

**PREF A - TO 18:** It forms and cuts 2.54 pitch transistors. It is possible to increase the D measure by spacing the MTA mask

\* The "c" value is referred to boards of 1.5mm thickness

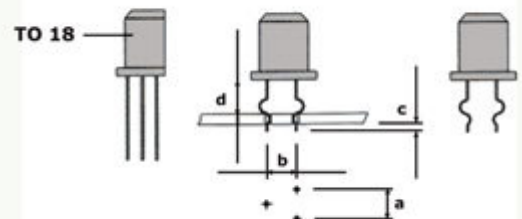


Order code	a (mm)	b (mm)	c* (mm)	d(mm)
<b>PREF A - TO 18</b>	2.54	1.27	1.40	4.00

### AWM Weidner

Kettmerstr. 25 D-70794 Filderstadt  
Tel.: 0711 7009503 Fax. 0711 7009504  
info@awm-weidner.de www.awm-weidner.de




## PREF A5 - TO 39 - TO5

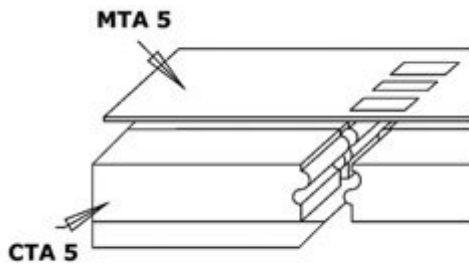

### PREF A5 - TO 39/TO5:


It forms and cuts 5.08 pitch transistors. It is possible to increase the D measure by spacing the MTA5 mask

\* The "c" value is referred to boards of 1.5mm thickness

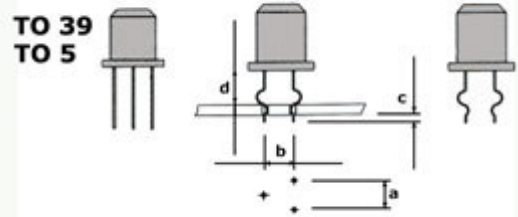


Order code	a (mm)	b (mm)	c* (mm)	d(mm)
				4.00
PREF A5 - TO 39	5.08	2.54	1.40	

## PREF B - LED

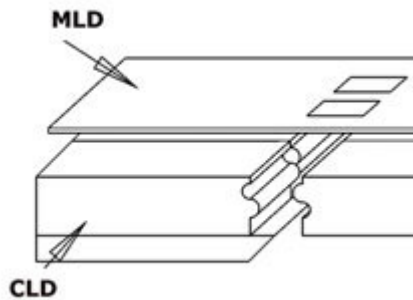

**PREF B - LED:** It forms and cuts 2.54 pitch led with the MLD mask, or 5.08 pitch led with the MCC mask. It is possible to increase the D measure by spacing the MLD or the MCC masks

\* The "c" value is referred to boards of 1.5mm thickness

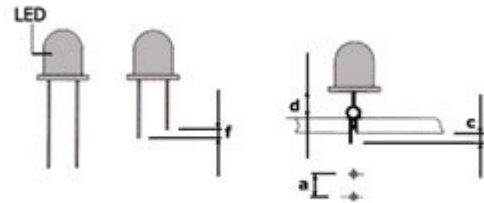


Order code	a (mm)	c* (mm)	d (mm)	f (mm)
PREF B - LED	2.54 - 5.08	1.40 short side	3.50	0.60

## AWM Weidner


Kettmerstr. 25 D-70794 Filderstadt  
 Tel.: 0711 7009503 Fax. 0711 7009504  
 info@awm-weidner.de www.awm-weidner.de



## PREF C - CAPACITOR

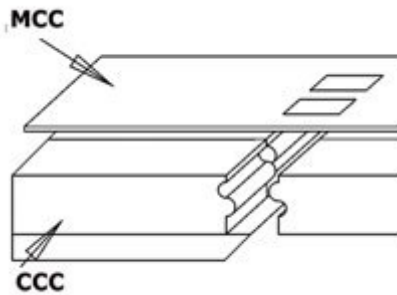


**PREF C-CAPACITOR:** It forms and cuts the leds of 5.08 pitch capacitors. It is possible to increase the D measure by spacing the MCC mask

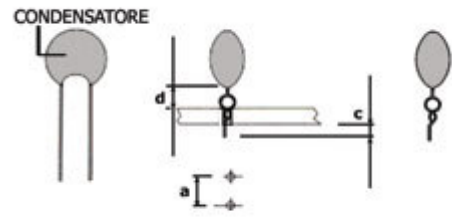


\* The "c" value is referred to boards of 1.5mm thickness

Order code	a (mm)	c* (mm)	d (mm)
PREF C-CAPACITOR	5.08	2.00	3.50

## PREF D - LED/CAPACITOR

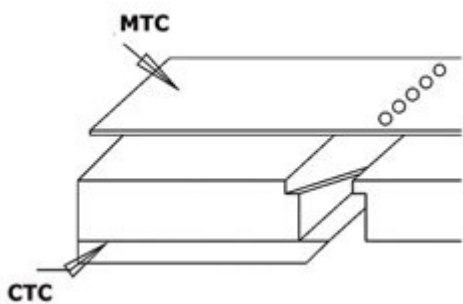

**PREF D-LED/CAPACITOR** For cutting leds and capacitors when polarity needs to be distinguished. It is possible to increase the C measure by spacing the MTC mask

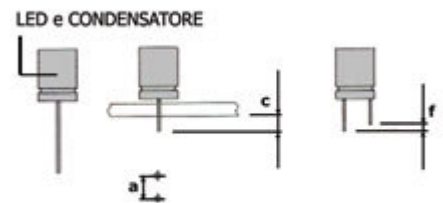

\* The "c" value is referred to boards of 1.5mm thickness


Order code	a (mm)	c* (mm)	d (mm)
PREF D-LED/CAPACITOR	2.54	1.50-4.50	0.6

## AWM Weidner

Kettnerstr. 25 D-70794 Filderstadt  
Tel.: 0711 7009503 Fax. 0711 7009504  
info@awm-weidner.de www.awm-weidner.de




## PREF E - TO220

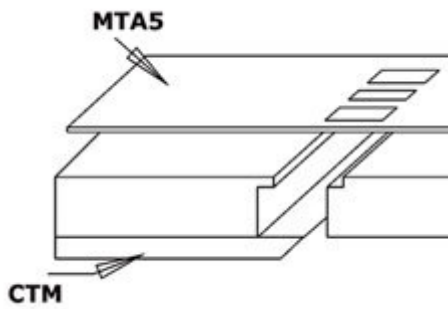


**PREF E-TO220:** It forms and cuts the leds of TO 220 components. It is possible to increase the D and the G measures by spacing the MTA5 mask

\* The "c" value is referred to boards of 1.5mm thickness

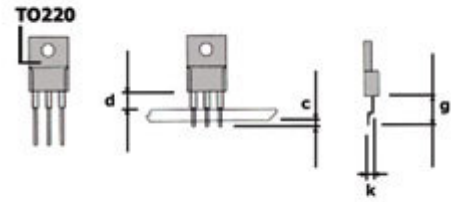


Order code	c* (mm)	d (mm)	k (mm)	g (mm)
PREF E-TO220	1.50	4.00	2.54	7.00

## PREF F - TO220

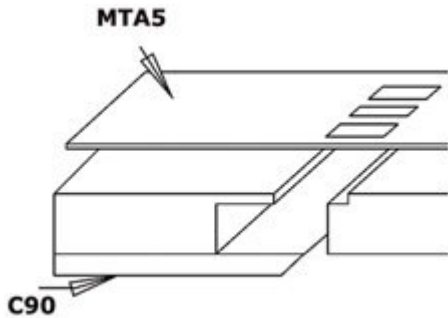

**PREF F - TO220:** It forms at 90°angle and cuts the leds of TO 220 components, leds and capacitors. It is possible to increase the I measure by spacing the MTA5 mask

\* The "c" value is referred to boards of 1.5mm thickness

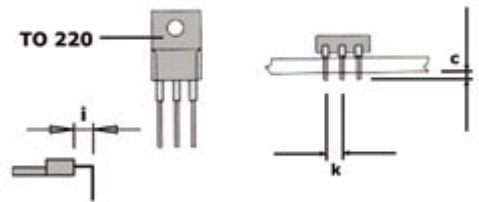


Order code	c* (mm)	i (mm)	k (mm)
PREF F - TO220	1.50	2.50	2.54

## AWM Weidner

Kettemerstr. 25 D-70794 Filderstadt  
Tel.: 0711 7009503 Fax. 0711 7009504  
info@awm-weidner.de www.awm-weidner.de




## PREF G - OSCILLATOR

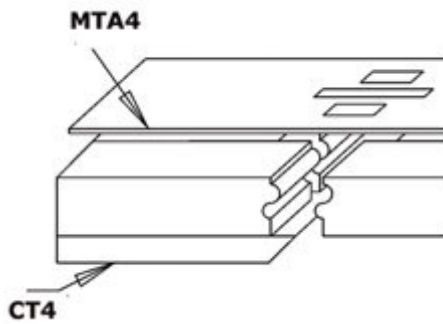


**PREF G-OSCILLATOR:** It forms and cuts oscillators. It is possible to increase the D measure by spacing the MTA4 mask

\* The "c" value is referred to boards of 1.5mm thickness

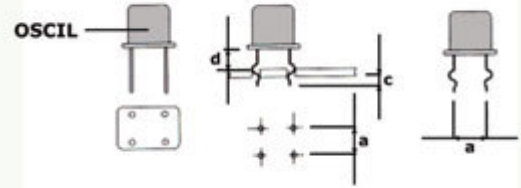


Order code	a (mm)	c* (mm)	d (mm)
PREF G-OSCILLATOR	5.08-7.62	1.50	4.00

## PREF H - TO220 / CAPACITOR/LED

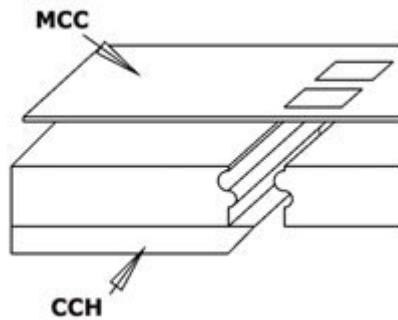

**PREF H - TO220 / CAPACITOR/LED:** It forms and cuts TO220 components, leds and capacitors. It is possible to increase the D measure by spacing the MTA5 mask (for TO220), the MCC mask (for capacitors), the MLD mask (for leds).

\* The "c" value is referred to boards of 1.5mm thickness

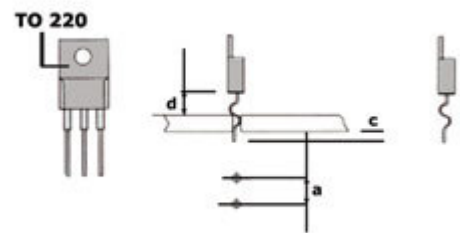


Order code	a (mm)	c* (mm)	d (mm)
PREF H - TO220 / CAPACITOR/LED	TO 220 conden led	1.40	4.00

## AWM Weidner


Kettmerstr. 25 D-70794 Filderstadt  
 Tel.: 0711 7009503 Fax. 0711 7009504  
 info@awm-weidner.de www.awm-weidner.de



## PREF I - TO220

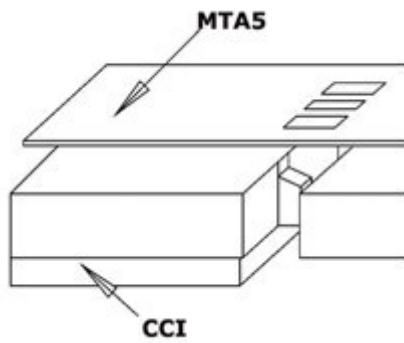


**PREF I - TO220:** Special forming mask for the forming of TO 220 and TO 247. 2.54mm pitch of the central lead.




Order code	a (mm)	b (mm)
PREF I - TO220	2.54	3.00

## PREF M - TO220

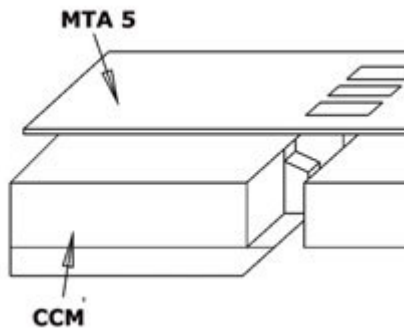


**PREF M-TO220:** Special forming mask for the forming of TO 220. 2.54mm shift of the centre lead

\* The "c" value is referred to boards of 1.5mm thickness

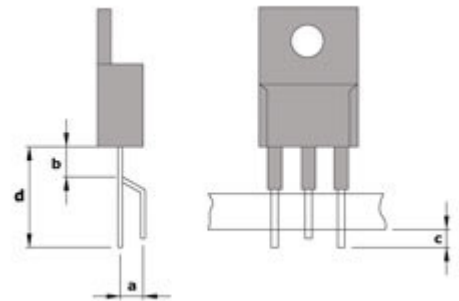


Order code	a (mm)	b (mm)	c* (mm)	d (mm)
PREF M-TO220	2.54	3.00	2.00	7.50

## PREF P - LED OR CAPACITOR

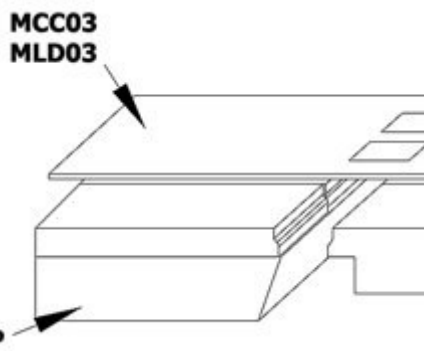

**PREF P - LED OR CAPACITOR:** It forms and cuts leds and capacitors, 2.54 pitch with mask or 5.08 pitch with MCC03 mask

\* The "c" value is referred to boards of 1.5mm thickness

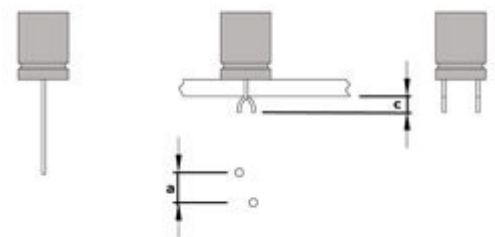

Order code	a (mm)	c* (mm)
PREF P - LED OR CAPACITOR	2.54-5.08	1.50

## AWM Weidner

Kettenerstr. 25 D-70794 Filderstadt  
Tel.: 0711 7009503 Fax. 0711 7009504  
info@awm-weidner.de www.awm-weidner.de

