
Cutting, Stamping and Forming Machines Type C 043

for loose or belted axial Components



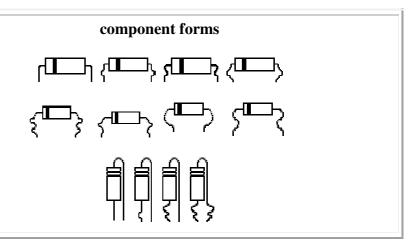

Specification

- dimension 840 x 480 x 450 mm

- weight approx. 45 kg

- electrical 230 V / 50 Hz / 200 W

- bending tool horizontal and vertical bendings

- min. pitch horizontal: 7,5 mm

vertical: 2,5 mm

- max. pitch horizontal: 50 mm

vertical: 5 (7,5) mm

- lead Ø horizontal: 0,4 to 1,3 mm

vertical: up to 0,8 mm

- components taped

- production rate 8.000 pcs/hr (continuously variable)

- manual supplyment for lose components

- Option - digital display for pitch and cut length

- survey for component-roll or ammo-pack

Description:

The Burst & Zick machine Type C 043 is designed, to cut stamp and bend axial leaded components for both horizontal and vertical mounting.

To make the insertion of components with short leads into p. c. boards possible, the leads have to be cut to suitable length, bend to the required pitch and -if necessary- stamped.

Both, suitable length and required pitch can be adjusted by adjusting screws. After this set-up the components can be processed.

AWM Weidner

Kettemerstr. 25 D-70794 Filderstadt Tel.: 0711 7009503 Fax. 0711 7009504





Option: the adjustments can be checked by a digital display.

The stamping result for the leads depends on the used tool. These tools can be manufactured to meet customer requirements. The machine can be re-set for the different tools.

The taped components can be processed automatically. The processing-speed is continuously variable. The tool change for different bending dimensions takes about 2 minutes.

