


Cutting, Stamping and Forming Machine Type C 043 ES

for loose or belted axial Components



component forms

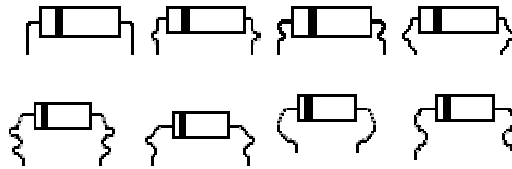

Specification

- | | |
|-------------------|--|
| - dimension | 600 x 480 x 450 mm |
| - weight | approx. 45 kg |
| - electrical | 230 V / 50 Hz / 200 W |
| - compressed air | 6 bar |
| - bending tool | horizontal bendings |
| - min. pitch | 7,5 mm |
| - max. pitch | 50 mm |
| - lead Ø | 0,4 to 1,3 mm |
| - components | taped |
| - production rate | 3.600 pcs/hr (continuously variable) |
| - Option | - manual supplyment for lose components
- digital display for pitch and cutlength
- pre-set and item counter
- survey for component-roll or ammo-pack |

Description:

To make the insertion of components with short leads into p. c. boards possible, the leads have to be cut to suitable length, bend to the required pitch and -if necessary- stamped.

Both, suitable length and required pitch can be adjusted by adjusting screws. After this set-up the components can be processed. Cutting length and pitch are fully adjustable.

The stamping result for the leads depends on the used tool. Lead forming is tool specific and can be manufactured to meet customer requirements.

The difference to the types C 043 and C 043 E is the integrated Pneumatic which makes the rearrangement of the Bending- and Forming tools possible.

AWM Weidner

Kettemerstr. 25 D-70794 Filderstadt
Tel.: 0711 7009503 Fax. 0711 7009504
info@awm-weidner.de www.awm-weidner.de



It means, that the tools can be approached to the components. Especially bendings with Flush-Mount-bead can be done.

The taped components can be processed automatically. The processing-speed is continuously variable. The tool change for different bending dimensions takes about 5 minutes.

AWM Weidner

Kettenerstr. 25 D-70794 Filderstadt
Tel.: 0711 7009503 Fax. 0711 7009504
info@awm-weidner.de www.awm-weidner.de

