


2000SE Version 1000 Holes Electronic Component Former and Cutter

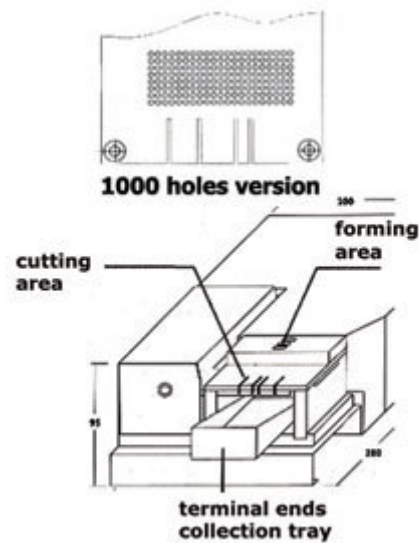

Order code	Cutting capacity comp/h	Holes diameter Ø mm	Eyelet diameter Ø mm	Weight (gr)	Dimensions
2000SE 1000 HOLES VERSION	1300-1800	1.2	1.0	10.0	200x280x95


2000SE 1000 holes is a pneumatic machine for the forming and cutting (standard height 3 mm) of untaped electronic component terminals. 2000SE 1000 holes is supplied with a further cutting mask (1.5 mm height).

Holes diameter: 1.2 mm

Eyelet diameter: 1.0 mm


Several forming masks are available on request:

PREF A - TO 18

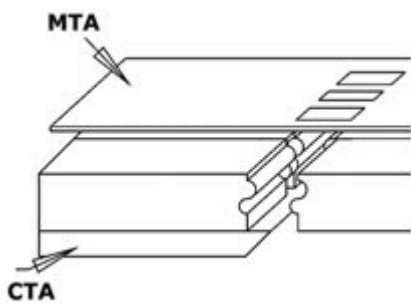

PREF A - TO 18: It forms and cuts 2.54 pitch transistors. It is possible to increase the D measure by spacing the MTA mask

* The "c" value is referred to boards of 1.5mm thickness

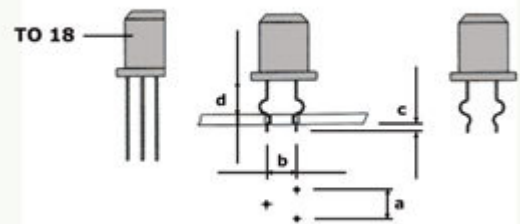


Order code	a (mm)	b (mm)	c* (mm)	d(mm)
PREF A - TO 18	2.54	1.27	1.40	4.00

AWM Weidner

Kettmerstr. 25 D-70794 Filderstadt
Tel.: 0711 7009503 Fax. 0711 7009504
info@awm-weidner.de www.awm-weidner.de



PREF A5 - TO 39 - TO5

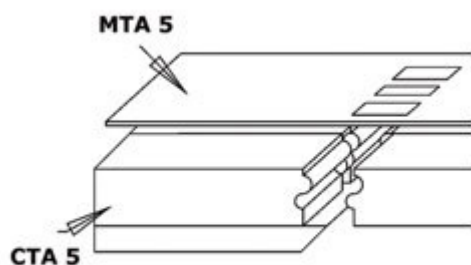


PREF A5 - TO 39/TO5:

It forms and cuts 5.08 pitch transistors. It is possible to increase the D measure by spacing the MTA5 mask


* The "c" value is referred to boards of 1.5mm thickness

TO 39
TO 5

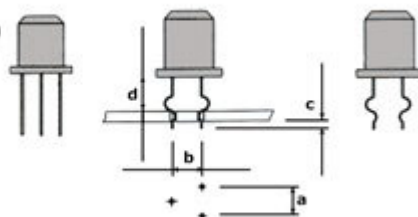


Order code	a (mm)	b (mm)	c* (mm)	d(mm)
				4.00
PREF A5 - TO 39	5.08	2.54	1.40	

PREF B - LED

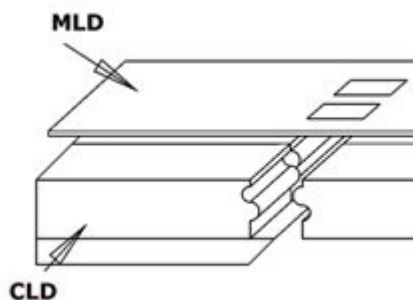

PREF B - LED: It forms and cuts 2.54 pitch led with the MLD mask, or 5.08 pitch led with the MCC mask. It is possible to increase the D measure by spacing the MLD or the MCC masks

* The "c" value is referred to boards of 1.5mm thickness

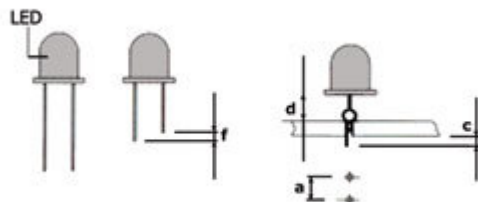


Order code	a (mm)	c* (mm)	d (mm)	f (mm)
PREF B - LED	2.54 - 5.08	1.40 short side	3.50	0.60

AWM Weidner


Kettmerstr. 25 D-70794 Filderstadt
Tel.: 0711 7009503 Fax. 0711 7009504
info@awm-weidner.de www.awm-weidner.de



PREF C - CAPACITOR

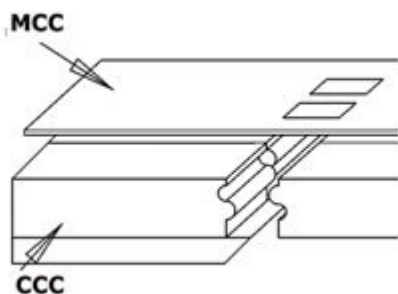


PREF C-CAPACITOR: It forms and cuts the leds of 5.08 pitch capacitors. It is possible to increase the D measure by spacing the MCC mask

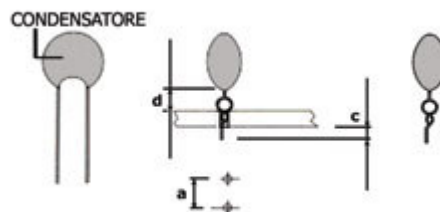


* The "c" value is referred to boards of 1.5mm thickness

Order code	a (mm)	c* (mm)	d (mm)
PREF C-CAPACITOR	5.08	2.00	3.50

PREF D - LED/CAPACITOR

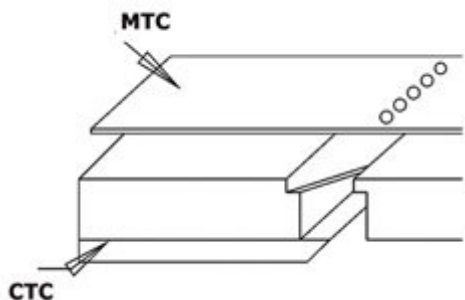

PREF D-LED/CAPACITOR For cutting leds and capacitors when polarity needs to be distinguished. It is possible to increase the C measure by spacing the MTC mask

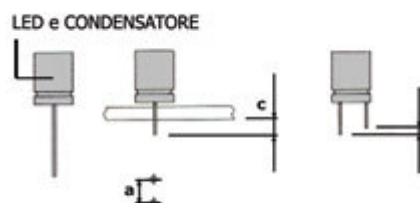

* The "c" value is referred to boards of 1.5mm thickness


Order code	a (mm)	c* (mm)	d (mm)
PREF D-LED/CAPACITOR	2.54	1.50-4.50	0.6

AWM Weidner

Kettnerstr. 25 D-70794 Filderstadt
Tel.: 0711 7009503 Fax. 0711 7009504
info@awm-weidner.de www.awm-weidner.de




PREF E - TO220

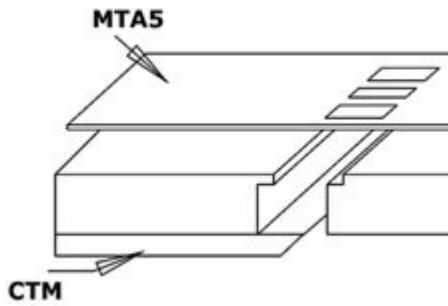


PREF E-TO220: It forms and cuts the leds of TO 220 components. It is possible to increase the D and the G measures by spacing the MTA5 mask

* The "c" value is referred to boards of 1.5mm thickness

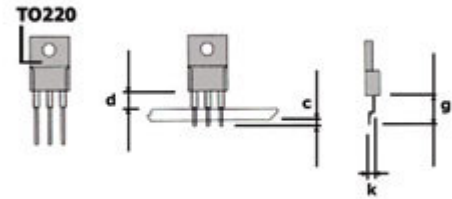


Order code	c* (mm)	d (mm)	k (mm)	g (mm)
PREF E-TO220	1.50	4.00	2.54	7.00

PREF F - TO220

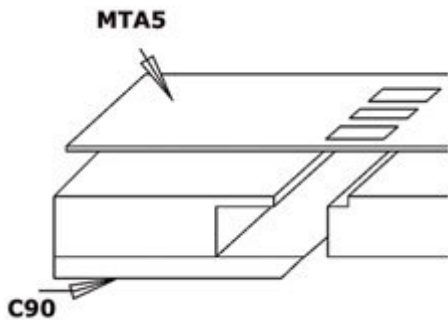

PREF F - TO220: It forms at 90°angle and cuts the leds of TO 220 components, leds and capacitors. It is possible to increase the I measure by spacing the MTA5 mask

* The "c" value is referred to boards of 1.5mm thickness

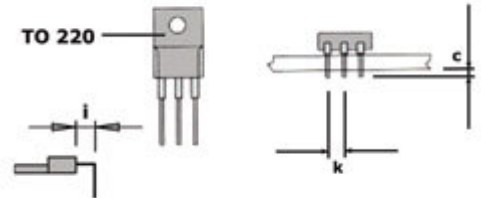


Order code	c* (mm)	i (mm)	k (mm)
PREF F - TO220	1.50	2.50	2.54

AWM Weidner

Kettenerstr. 25 D-70794 Filderstadt
 Tel.: 0711 7009503 Fax. 0711 7009504
 info@awm-weidner.de www.awm-weidner.de




PREF G - OSCILLATOR

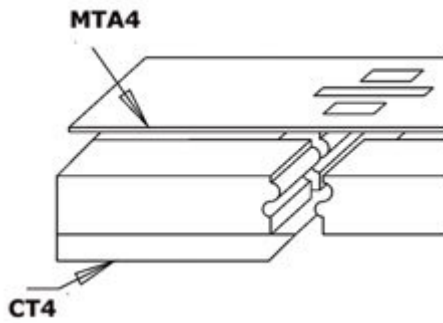


PREF G-OSCILLATOR: It forms and cuts oscillators. It is possible to increase the D measure by spacing the MTA4 mask

* The "c" value is referred to boards of 1.5mm thickness

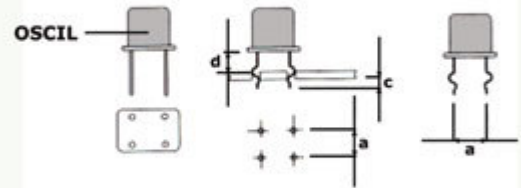


Order code	a (mm)	c* (mm)	d (mm)
PREF G-OSCILLATOR	5.08-7.62	1.50	4.00

PREF H - TO220 / CAPACITOR/LED

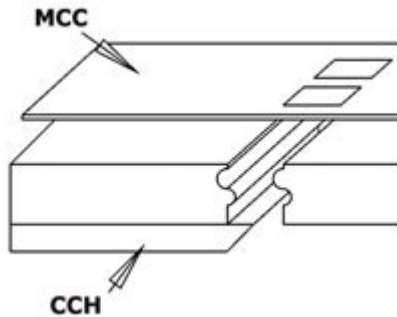

PREF H - TO220 / CAPACITOR/LED: It forms and cuts TO220 components, leds and capacitors. It is possible to increase the D measure by spacing the MTA5 mask (for TO220), the MCC mask (for capacitors), the MLD mask (for leds).

* The "c" value is referred to boards of 1.5mm thickness

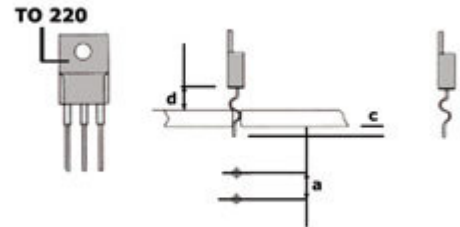


Order code	a (mm)	c* (mm)	d (mm)
PREF H - TO220 / CAPACITOR/LED	TO 220 conden led	1.40	4.00

AWM Weidner


Kettemerstr. 25 D-70794 Filderstadt
Tel.: 0711 7009503 Fax. 0711 7009504
info@awm-weidner.de www.awm-weidner.de



PREF I - TO220

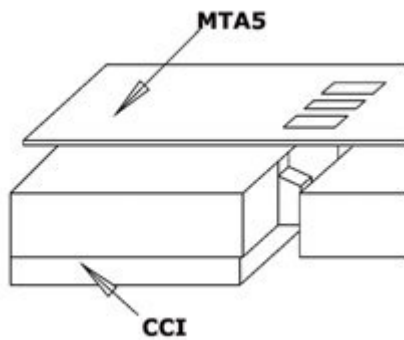


PREF I - TO220: Special forming mask for the forming of TO 220 and TO 247. 2.54mm pitch of the central lead.




Order code	a (mm)	b (mm)
PREF I - TO220	2.54	3.00

PREF M - TO220

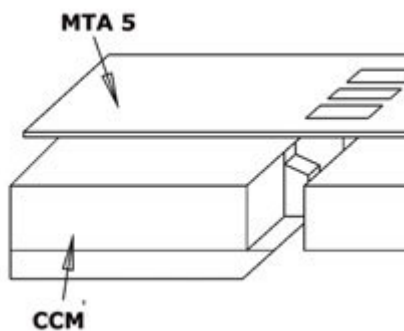


PREF M-TO220: Special forming mask for the forming of TO 220. 2.54mm shift of the centre lead
* The "c" value is referred to boards of 1.5mm thickness

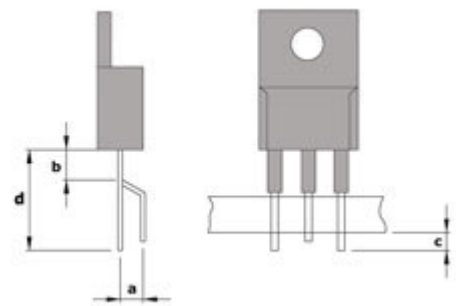


Order code	a (mm)	b (mm)	c* (mm)	d (mm)
PREF M-TO220	2.54	3.00	2.00	7.50

PREF P - LED OR CAPACITOR

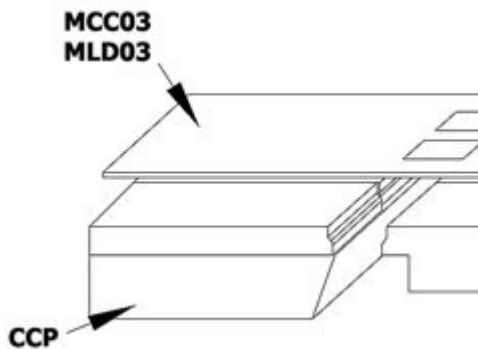

PREF P - LED OR CAPACITOR: It forms and cuts leds and capacitors, 2.54 pitch with mask or 5.08 pitch with MCC03 mask
* The "c" value is referred to boards of 1.5mm thickness

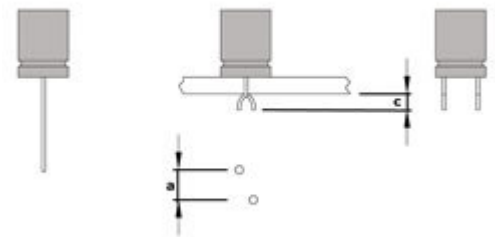

Order code	a (mm)	c* (mm)
PREF P - LED OR CAPACITOR	2.54-5.08	1.50

AWM Weidner

Kettmerstr. 25 D-70794 Filderstadt
Tel.: 0711 7009503 Fax. 0711 7009504
info@awm-weidner.de www.awm-weidner.de

