


## Universal Cutting- and Forming Machine Type C 092

for taped radial components



### Component forms

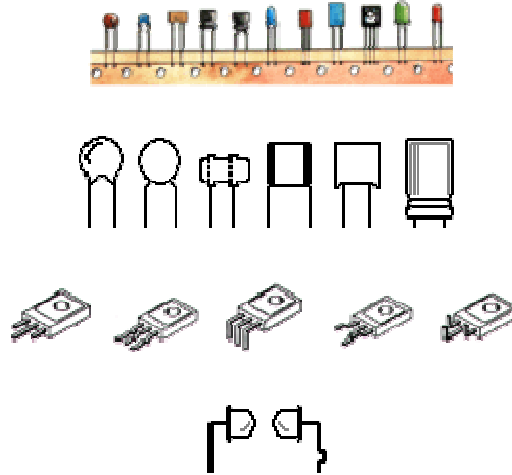

### Specification

- dimensions	650 mm x 450 mm x 500 mm
- weight	approx. 35 kg
- electrical	230 V / 50 Hz / 110 W
- control	Siemens SPS "LOGO"
- pneumatic	6 bar
- pitch	min: 2,5 mm, max.: form dependend
- holepitch	12,7 mm and 15 mm
- lead Ø	0,4 to 1,0 mm
- components	taped
- delivery	reel or ammopack
- rate	with touching max. 3.000 pcs/hr without touching max. 4.000 pcs/hr

### Description:

The model C 092 has been developed to process taped components with hole pitches of 12.7 mm and 15 mm with one machine. To eliminate any kind of inconsistencies due to variances in taping, this machine is fitted with a touch-tool that will verify the cut length.

The machine was developed with two processing units for multiple die sets. The die inserts can be exchanged very quickly. Because of the dual

### AWM Weidner

Kettemerstr. 25 D-70794 Filderstadt  
Tel.: 0711 7009503 Fax. 0711 7009504  
info@awm-weidner.de www.awm-weidner.de



processing-units a wide range of bending and stamping forms can be processed.

**Options:**

1. roll-off block for all in trade reels
2. electronic counter, which cuts off the Automat automatically when the pre-defined number of items is reached.

**AWM Weidner**

Kettenerstr. 25 D-70794 Filderstadt  
Tel.: 0711 7009503 Fax. 0711 7009504  
[info@awm-weidner.de](mailto:info@awm-weidner.de) [www.awm-weidner.de](http://www.awm-weidner.de)

